

LC-UPC Singlemode Patch Cord

Patch Cord LC-UPC, LSZH Duplex Patch Cord

Infinique's LC-UPC Singlemode Patch Cord are pre-polished in the factory and have been designed for low loss and high speed data transmission. Fitted on both sides with Ultra Polished Connectors, the connector housing and shutters fully protect the ferrule against dust, dirt and scratching. Each patch cord passes the stringent 400x visual inspection and are tested for insertion and return loss before being individually packed with the test report.


Bend-insensitive, G.657A1 LSOH Singlemode TB Fiber is used in the manufacture of patch cords that assures low bending loss and protection against accidental tight bends down to 7.5 mm radius.

To confirm high performance and reliability, these patch cords are tested and certified as per Telcordia standards GR-326, Generic Requirements for Single-Mode Optical Connectors and Jumper Assemblies.

Features and Benefits

- **Certification**
IEC, EIA/TIA, Telcordia GR-326 Standards
- **Reliable Performance**
Connector End Face Geometry is factory inspected in compliance with Telcordia GR-326 Standard to ensure high performance
- **Quality Design**
Bend-insensitive, G.657A1, Gel Free, LSZH Fiber Cable
- **Easy Identification**
Color coded connectors and cable as per Telcordia standards, unique serial number for traceability
- **Speedy Installation**
Pre-assembled patch cords offers plug-n-play solution and speedy installation

LC-UPC SINGLEMODE DUPLEX PATCH CORD CONSTRUCTION

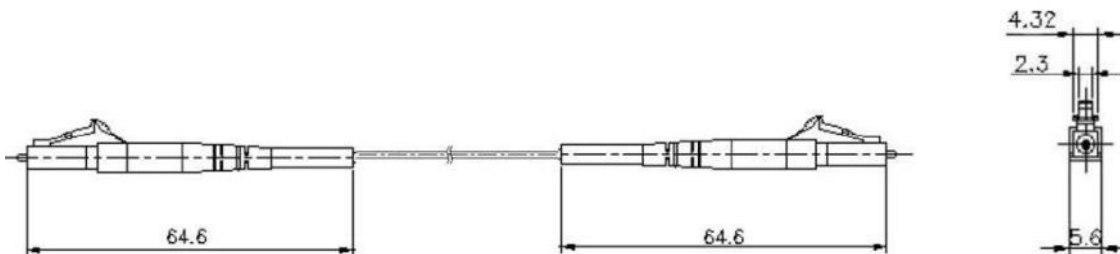

LC-UPC Singlemode Patch Cord

Patch Cord LC-UPC, LSZH Duplex Patch Cord

CONNECTOR SPECIFICATIONS

Connector Type A	LC-UPC
Connector Type B	LC-UPC
Ferrule Material	Ceramic
Connector Polish	UPC
Housing Material	Composite
Housing Color	White
Boot Type	Duplex
Boot Color	Blue
Durability	500 minimum mating cycles (IEC 61300-2-2)
Cable Retention	100N, 120s (IEC 61300-2-4)
End Face Geometry	Core Region: No Defects, Clad Region: 3 µm to 20 µm (IEC 61300-3-16/16/23)
End Face Geometry Structure	Curvature Radius: 5-12 µm , Fiber Spherical Height ±0.05 µm, Sphere Offset: ≤ 50 µm
Insertion Loss, Typical	≤ 0.2 dB (IEC 61300-3-4)
Insertion Loss, Max	< 0.3 dB (IEC 61300-3-4)
Return Loss, Max	≥ 65dB (IEC 61300-3-6)
Reflectance, Typical	≤ -65 dB

CABLE SPECIFICATIONS

Fiber Type	ITU G.657A1 Singlemode Fiber OS2
Fiber Count	Duplex - 2 Fibers
Fiber Core Diameter	9 µm
Wavelengths	1310 nm / 1550 nm
Linear Attenuation	1310nm: 0.38 dB/km / 1550nm: 0.25 dB/km
Minimum Bend Radius	7.5 mm (G.657A1 Bend Insensitive) (IEC 60794-1-2 E11)
Repeated Bending Cycles (r=25mm)	10,000 (IEC 60794-1-2 E6)
Crush Resistance	1000 N/10 cm
Tensile Strength	Installation: 400 N Operation: 2 x 100 (IEC 60794-1-2 E1)
Outer Jacket Diameter	Ø 2.8 mm, Length 1, 2, 3 meter or Custom Length
Outer Jacket Material	LSZH
Outer Jacket Color	Yellow

TEMPERATURE RANGE

Installation and Assembly	-20 °C to +60 °C
Operating Temperature	-40 °C to +75 °C
Storage Temperature	-55 °C to +85 °C

STANDARDS

GR-326, Generic Requirements for Single-Mode Optical Connectors and Jumper Assemblies
IEC 61034 and EN 50268 LSOH Low Smoke Zero Halogen

TEST REPORT FORMAT

Test Report Print: Packed with each individual product includes: Part Number, Description, Wavelength, Insertion Loss and Return Loss
Visual Inspection: Quality control visual inspection of the component is conducted to determine if the product passed the quality test.
Component Packing: Quality control visual inspection of the packing is conducted to determine if the component is packed correctly with product label and test report.

PACKING

The LC-UPC Singlemode Patch Cords are packaged individually along with the printed test report.

ORDERING INFORMATION

Part Number	Description	Connector
IFPCSMCLCD1	Infinique Fiber Patch Cord LC-LC UPC Singlemode Duplex 1M	Singlemode LC-UPC
IFPCSMCLCD2	Infinique Fiber Patch Cord LC-LC UPC Singlemode Duplex 2M	Singlemode LC-UPC
IFPCSMCLCD3	Infinique Fiber Patch Cord LC-LC UPC Singlemode Duplex 3M	Singlemode LC-UPC
IFPCSMCLCD5	Infinique Fiber Patch Cord LC-LC UPC Singlemode Duplex 5M	Singlemode LC-UPC
IFPCSMCLCD10	Infinique Fiber Patch Cord LC-LC UPC Singlemode Duplex 10M	Singlemode LC-UPC



Infinique, a Canadian company is a manufacturer of high performing end-to-end solutions in copper, fiber and video surveillance systems. For more information visit our website at www.infinique.com or email us at sales@infinique.com.